

Hydraulic Technologies 5885 11th Street Rockford, IL 61109-3699 USA Order Entry: (800) 541-1418

powerteam.com

Tech. Services: (800) 477-8326 Fax: (800) 765-8326


Fax: (800) 288-7031

Parts List for:

RH606 RH606N

SINGLE-ACTING, SPRING RETURN HYDRAULIC CYLINDER

Max. Capacity: 61.5 Tons at 10,000 PSI

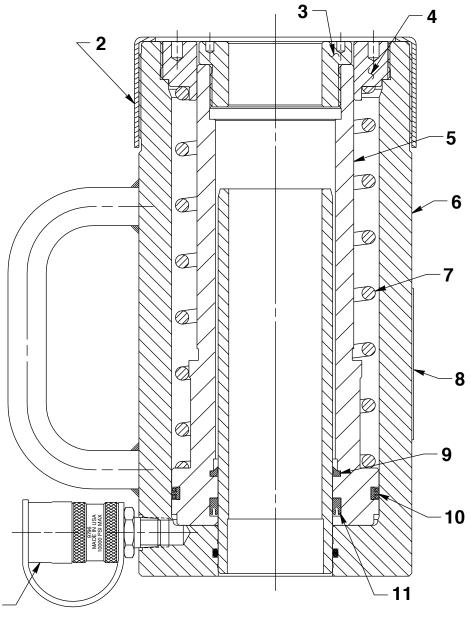



To help avoid personal injury, DO NOT disassemble cylinder. The retainer nut is loaded with 120 lbs. of spring force, and releasing this spring force improperly could result in serious bodily harm. All repairs must be done by an authorized Power Team Hydraulic Service Center.


Sheet No.	1 of 1
Rev. 2	12-7-2010

Item	Part	No.	
No.	No.	Req'd	Description
1	9796	1	Ram Half Coupler w/ Dust Cap
2	42194	1	Thread Protector
3	34250	1	Plain Insert
4	46720	1	Spring Retainer Nut (NOTE: Loaded with 120 lbs. spring force)
5	52872	1	Piston Rod
6	350992	1	Cylinder Standpipe Assembly (For RH606)
	350991	1	Cylinder Standpipe Assembly (For RH606N)
7	213200	1	Compression Spring (4.704 O.D. X 11-1/2 Lg.)
8	307156	1	Trade Name Decal (For RH606)
	350987	1	Trade Name Decal (For RH606N)
9	*207721	1	Rod Wiper
	†206123	1	Rod Wiper
	·252063	1	Rod Wiper
10	*14334	1	T-seal (Piston) & Backup Rings (Smooth side of Backup Ring must be against Seal)
	†19245	1	T-seal (Piston) & Backup Rings (Smooth side of Backup Ring must be against Seal)
	•252062	1	T-seal (Piston) & Backup Rings (Smooth side of Backup Ring must be against Seal)

Part No.	No. Req'd	Description
*14333	1	U-cup
†206145	1	U-cup
·252061	1	U-cup
PARTS	INCLU	DED BUT NOT SHOWN
·*†203908	1	Warning Decal
†205724	1	Decal (Viton)
·252058	1	O-ring
		(3/4 X 9/16 X 3/32, -113; For Coupler
•251880	1	O-ring (1" X 3/4 X 1/8, -210; For Coupler)
in Sta numbers ma V t numbers m	ndard F arked w iton Se narked	with an asterisk (*) are contained Repair Kit No. 300477. with a dagger (†) are contained i al Kit No. 300476. with a bullet (•) are contained in I Seal Kit No. 300878.
	†206145 •252061 PARTS •*†203908 †205724 •252058 •251880 numbers m in Stall numbers material	†206145 1 •252061 1 PARTS INCLU •*†203908 1 †205724 1 •252058 1 •251880 1 numbers marked v in Standard F numbers marked v Viton Se t numbers marked



To help avoid personal injury, DO NOT disassemble cylinder. The retainer nut is loaded with 120 lbs. of spring force, and releasing this spring force improperly could result in serious bodily harm. All repairs must be done by an authorized Power Team Hydraulic Service Center.

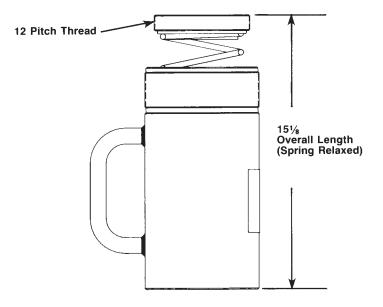

Refer to any operating instructions included with this product for detailed information about operation, testing, disassembly, reassembly, and preventive maintenance.

Items found in this parts list have been carefully tested and selected. **Therefore: Use only genuine Power Team replacement parts!**

Additional questions can be directed to our Technical Services Department.