


SPX
HYDRAULIC TECHNOLOGIES

DISTRIBUTION POWER UNIT PROGRAM

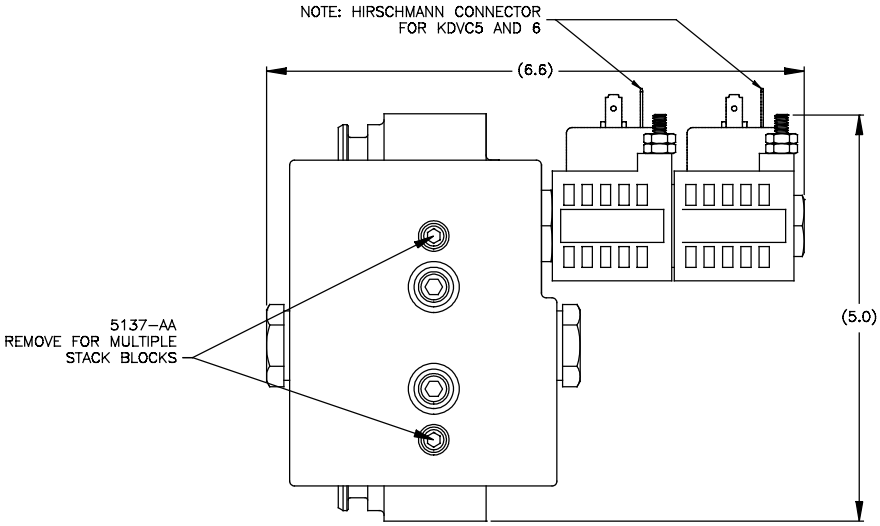

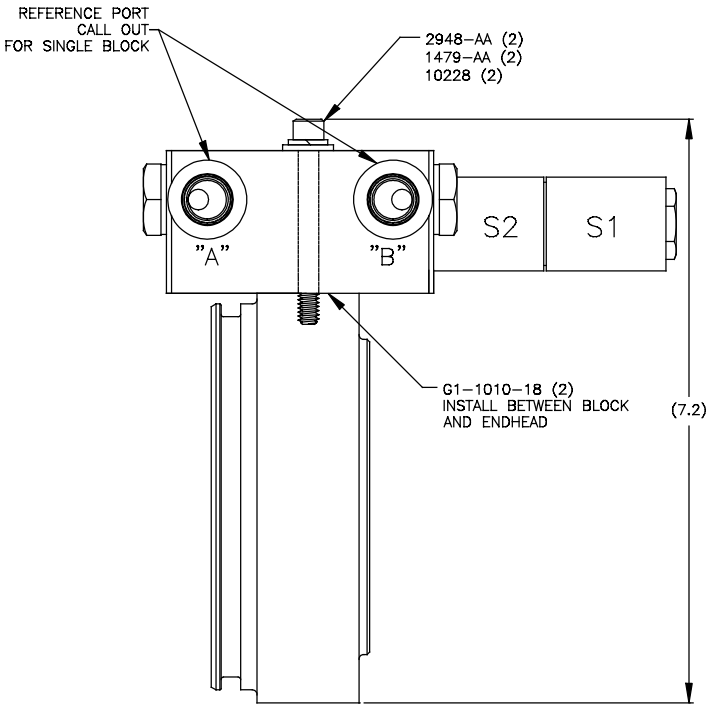



NOTES:

1) MOUNT VALVE ASSEMBLY WITH VALVE COIL ON MOTOR SIDE OF ENDHEAD.
2) FOR DOUBLE OR TRIPLE STACK CONFIGURATIONS, USE KDVC–BK2 OR KDVC–BK3 BOLT KIT.
3) FOR DOUBLE AND TRIPLE STACKS, REMOVE 5137–AA FROM BOTTOM VALVE BLOCK(S) ONLY.
4) KIT INCLUDES ALL SEALS AND MOUNTING HARDWARE FOR SINGLE VALVE BLOCK MOUNTING ONLY. SEE NOTE 1 FOR DOUBLE AND TRIPLE STACK CONFIGURATIONS.
5) IF USED WITH LARGE MOTOR, KR4_ OR KR7_ TANKS, ORDER VALVE SPACER K–29.
6) REMOTE CORDSET AVAILABLE. USE KG13 WITH KSX OR KG13A WITH KS5.

CHANGE	ECN1103859			TITLE FORM, INSTRUCTION FOR KDVC 3, 4, 5 AND 6	SCALE NONE	REV. 1
DRAWN KSS	DATE 13-MAY-2010	CHECK ARH	DATE 24-MAY-10	PART NO. KDVC 3, 4, 5, AND 6 (1)	DRAWING NUMBER 1000440	