

Hydraulic Technologies 5885 11th Street Rockford, IL 61109-3699 USA Tech. Services: (800) 477-8326 Fax: (800) 765-8326 Order Entry: (800) 541-1418 Fax: (800) 288-7031

Internet Address: http://www.powerteam.com


Parts List for:

2R552S C554C C5513C-POSI 2R556S C554C-PFAFF C5518C-TEX

2R5513S C556C C552C C5510C C552C-PFAFF C5513C

SINGLE-ACTING, SPRING RETURN HYDRAULIC CYLINDER

Max. Capacity: 55.2 Tons at 10,000 PSI

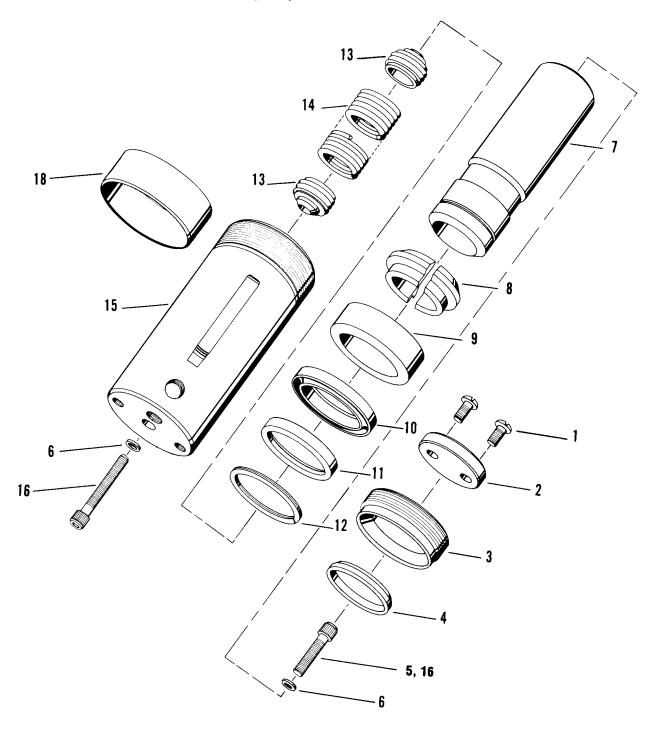

Item	Part	No.	
No.	No.	Req'd	Description
1	16112	2	Machine Screw (Torque to 50/60 in. lbs.)
2	36161	1	Front Plate
3	36138	1	Retainer Nut (Torque to 125/150 ft. lbs.)
4	*16117	1	Rod Wiper
•	†205718	1	Rod Wiper
5	10984	1	Soc. Hd. Cap Screw (3/8-16 x 1-1/2 Lg.; Torque to 400/425
Ü	10001	•	in. lbs For C556C, C552C, 2R552S, 2R556S, C554C & C554C-PFAFF)
6	*†12042	2	Copper Washer
7	50837	1	Piston Rod (For C556C, 2R556S)
	50836	1	Piston Rod (For C5513C, C5513C-POSI, & 2R5513S)
	51247	1	Piston Rod (For C552C, C552C-PFAFF & 2R552S)
	58062	1	Piston Rod (For C554C & C554C-PFAFF)
	58054	1	Piston Rod (For C5510C)
	58242	1	Piston Rod (For C5518C-TEX)
8	36001	1 pr.	Keeper Ring
9	201481	1	Piston Head
10	*15916	1	U-cup Piston Seal
	†205706	1	U-cup
11	201480	1	Slip Retainer
12	*16118	1	Retaining Ring
13	36170	2	Spring Retainer (See diagram on pg. 2 of 2)
14	201483	1	Extension Spring (For C556C, 2R556S)
	201484	1	Extension Spring (For C5513C, C5513C-POSI, & 2R5513S)
	204429	1	Extension Spring (For C552C, C552C-PFAFF & 2R552S)
	250292	1	Extension Spring (For C554C & C554C-PFAFF)
	250263	1	Extension Spring (For C5510C)
	250915	1	Extension Spring (For C5518C-TEX)
15	50838	1	Cylinder Body (For C556C, 2R556S)
	50839	1	Cylinder Body (For C5513C, & 2R5513S)
	51248	1	Cylinder Body (For C552C, C552C-PFAFF & 2R552S)
	58028	1	Cylinder Body (For C5513C-POSI)
	64095	1	Cylinder Body (For C554C & C554C-PFAFF)
	64075	1	Cylinder Body (For C5510C)
	64265	1	Cylinder Body (For C5518C-TEX)
16	16110	1	Soc. Hd. Cap Screw (3/8-16 x 3-1/2 Lg.; Torque to 400/425 in. lbs For C556C, 2R556S, C554C & C554C-PFAFF)
		2	Soc. Hd. Cap Screw (3/8-16 x 3-1/2 Lg.; Torque to 400/425 in. lbs For C5513C, C5513C-POSI, 2R5513S, & C5518C-TEX)
	11531	1	Soc. Hd. Cap Screw (3/8-16 x 2" Lg.; Torque to 400/425 in. lbs For C552C, C552C-PFAFF & 2R552S)
18	42193	1	Thread Protector
	PARTS INC		BUT NOT SHOWN
	*37782	1	Warning Decal
	203908	1	Warning Decal (For C552C & C554C)
	203908-CE	1	Warning Decal (For C552C-PFAFF & C554C-PFAFF)
	16170	1	Trade Name Decal (For C556C)
	16171	1	Trade Name Decal (For C5513C & C5513C-POSI)
	18880	1	Trade Name Decal (For C552C)
	210479	1	Trade Name Decal (For 2R552S)
	210480	1	Trade Name Decal (For 2R556S) CONTINUED ON

Part numbers marked with an asterisk (*) are contained in Standard Repair Kit No. 300114. Part numbers marked with a dagger (†) are contained in Viton Seal Kit No. 300215.


NEXT PAGE

Item	Part	No.	
No.	No.	Req'd	Description
	210849	1	Trade Name Decal (For 2R5513S)
	250293	1	Trade Name Decal (For C554C)
	250264	1	Trade Name Decal (For C5510C)
	202173	1	Trade Name Decal (For C5518C-TEX)
	252184	1	Trade Name Decal (For C552C-PFAFF & C554C-PFAFF)
	9796	1	Ram Half Coupler (For C552C, C556C, C5513C, C5513C-POSI, C552C-PFAFF & C5518C-TEX)
	210916	1	Ram Half Coupler (For 2R552S, 2R556S, & 2R5513S)
	†206557	1	U-cup Backup Washer
	†19526	1	O-ring (1" x 3/4 x 1/8; For coupler)
	†205724	1	Decal (Viton)

Part numbers marked with an asterisk (*) are contained in Standard Repair Kit No. 300114. Part numbers marked with a dagger (†) are contained in Viton Seal Kit No. 300215.

SPRING & RETAINER ASSEMBLY

The spring must not extend beyond the threads of the spring retainer on either end. Stretch, clean and lubricate the spring before assembly.

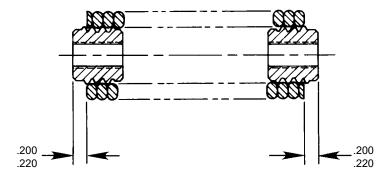

Refer to any operating instructions included with the product for detailed information about operation, testing, disassembly, reassembly and preventive maintenance.

Items found in this parts list have been carefully tested and selected. Therefore: Use only genuine replacement parts!

Additional questions can be directed to our Technical Services Department.