


**TWO POSTION, 3-WAY/4-WAY MANUAL -- REMOTE MOUNTED
VALVE ASSEMBLY**
Max. Capacity: 5,000 PSI

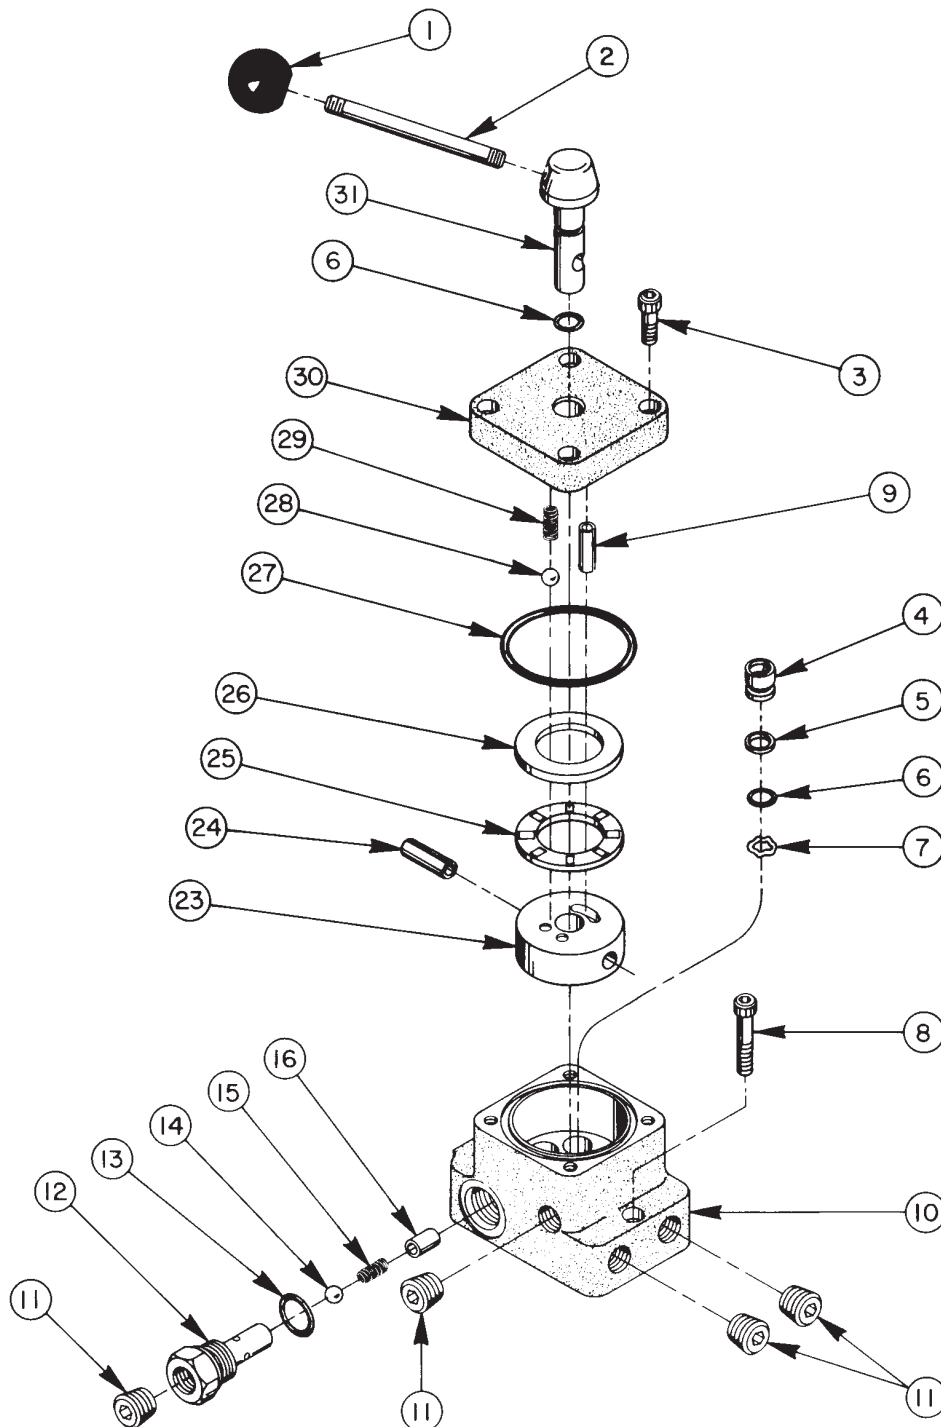

Item No.	Part No.	No. Req'd	Description
1	10731	1	Knob (1 3/8 Dia.)
2	21639	1	Stud
3	10008	4	Soc. Hd. Cap Screw (1/4-20 X 3/4 Lg.)
4	21921	3	Seal
5	*11863	3	Backup Washer (Teflon, -012)
6	*10268	4	O-ring (3/8 X 1/2 X 1/16, -012)
7	*21975	3	Spring Washer
8	10020	2	Soc. Hd. Cap Screw (1/4-20 X 1-1/4 Lg.)
9	11916	1	Roll Pin (1/4 Dia. X 7/8 Lg.)
10	50873	1	Valve Body
11	10479	4	Pipe Plug (1/4 NPTF - Torque to 50/60 in. lbs.)
12	36414	1	Check Valve Body
13	*10527	1	O-ring (13/16 X 5/8 X 3/32, -114)
14	10377	1	Steel Ball (5/16 Dia.)
15	15141	1	Compression Spring (3/16 O.D. X 5/8 Lg.)

Item No.	Part No.	No. Req'd	Description
16	201813	1	Ball Stop
23	36413	1	Rotor
24	10496	1	Roll Pin (5/16 X 1" Lg.)
25	11228	1	Needle Bearing
26	11227-1	1	Bearing Race
27	*11229	1	O-ring (2-3/8 X 2-3/16 X 3/32, -139)
28	10375	1	Steel Ball (1/4 Dia.)
29	16320	1	Compression Spring (1/4 O.D. X 3/4 Lg.)
30	201814	1	Valve Body Cap
31	201815	1	Valve Stem

PARTS INCLUDED BUT NOT SHOWN

201757	1	Trade Name Decal (For100234)
201760	1	Porting Decal
208358	1	Warning Decal
209067	1	Trade Name Decal (For 9606)

Part numbers marked with an asterisk (*) are contained in Repair Kit No. 300139.

SPECIFICATIONS

This is a remote mounted, manually-operated, detent two position, 3-way/4-way valve for use with power units. It is of a low torque design for use with double-acting or spring return cylinders. The pump pressure inlet port is equipped with an internal check valve.

OPERATION

POSITION "A": Pressure to Port "A", Port "B" to tank.


POSITION "B": Pressure to Port "B", Port "A" to tank.

NOTE: When using valve as a 3-way with spring return cylinders, plug either port "A" or "B".

Port Sizes: 1/4 NPTF

Maximum Pressure: 5,000 PSI

Maximum Recommended Flow: 5 GPM

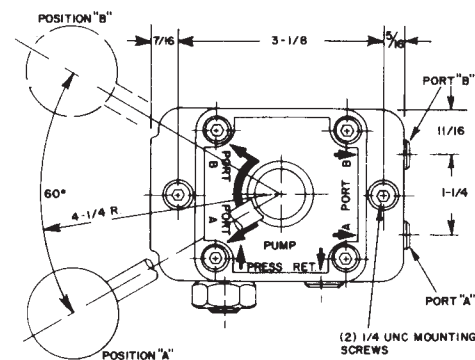

J.I.C. SYMBOLS

