


PILOT OPERATED CHECK VALVE

Max. Capacity: 5,000 PSI
Ratio 3:1

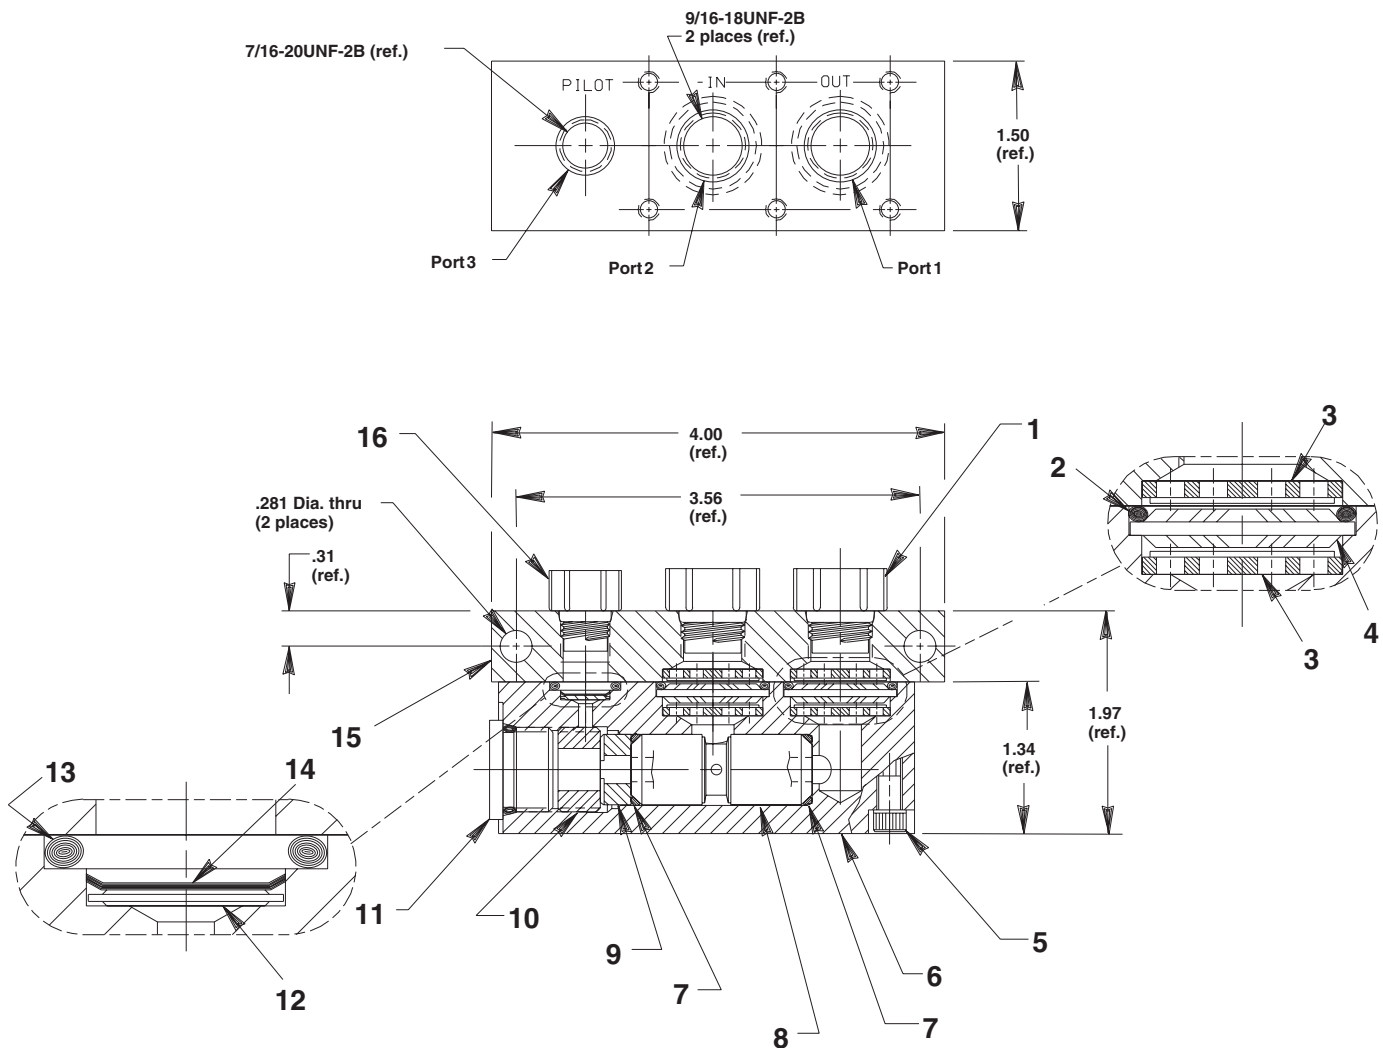


Item No.	Part No.	No. Req'd	Description
1	250962	2	Plastic Plug Fitting
2	10658	2	O-ring (1" X 13/16 X 3/32, -117)
3	†*250937	4	Disc Support
4	*250935	2	Pleated Filter Element
5	12650	6	Cap Screw (#10-24 UNC X 1-1/2 Lg.; Torque to 60/70 in. lbs.)
6	420509	1	Check Valve Block
7	16164	2	O-ring (5/8 x 1/2 x 1/16, -014)
8	214259	1	Pilot Operated Check Valve
9	214542	1	Spacer (Slot must face hollow lock screw)
10	17055	1	Screw (3/4-16 UNF x 3/8 Lg.; Torque to 22/27 ft. lbs.)
11	214014	1	Hex Female Drive O-ring Plug
12	250936	1	Filter Disc
13	10270	1	O-ring (5/8 x 7/16 x 3/32, -111)
14	11893	1	Retaining Ring
15	420445	1	Mounting Block
16	250961	1	Plastic Plug Fitting

*NOTE: These parts must have interference fit when assembled.

†Assemble with mesh side toward filter disk.

HYDRAULIC SCHEMATIC

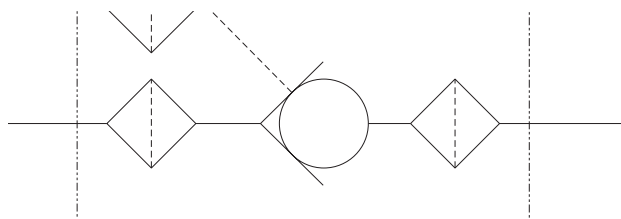

Refer to any operating instructions included with this product for detailed information about operation, testing, disassembly, reassembly, and preventive maintenance.

Items found in this parts list have been carefully tested and selected. **Therefore: Use only genuine Hytec replacement parts!**

Additional questions can be directed to our Technical Services Department.

NOTE: Shaded areas reflect last revision(s) made to this form.