
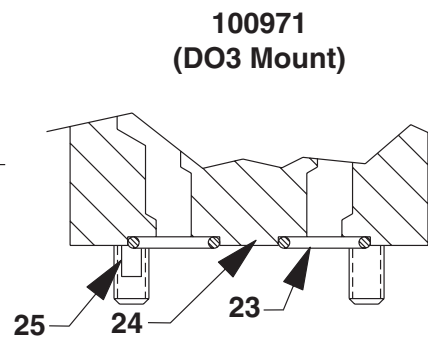
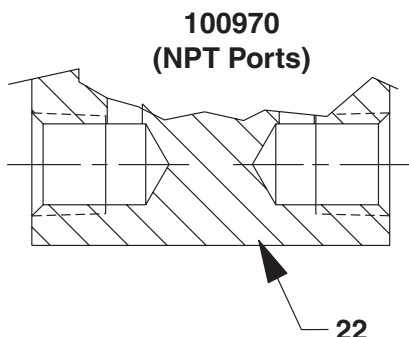
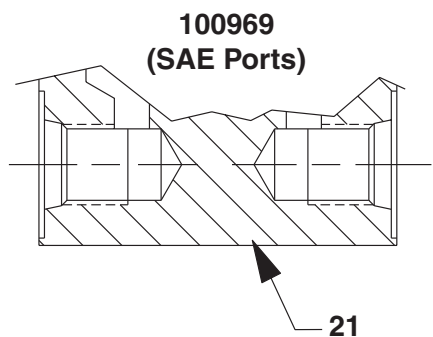


MODEL A
TWO POSITION, 4-WAY MANUAL
VALVE ASSEMBLY
Maximum Capacity: 5,000 PSI

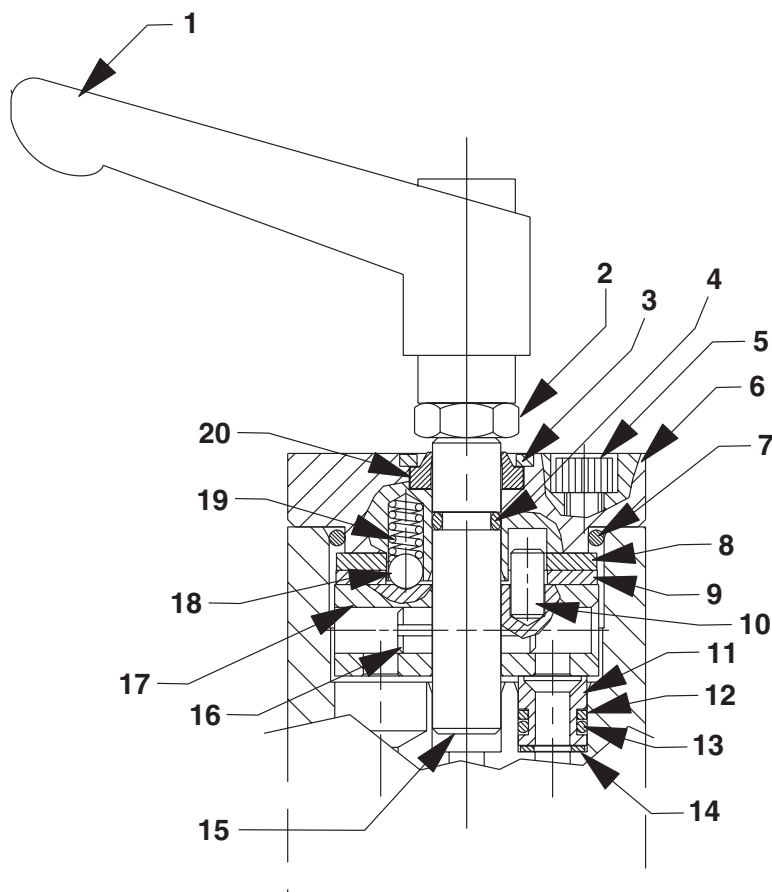

Item No.	Part No.	No. Req'd	Description
1	252332	1	Adjustable Handle
2	10385	1	Hex Jam Nut (5/16-18 UNC; Torque to 150/200 in. lbs.)
3	252214	1	Special Washer
4	*10266	4	O-ring (3/8 X 1/4 X 1/16)
5	11434	4	Socket Head Screw (10-24 UNC X 1/2 Lg., Torque 65/75 in. lbs.; For 100969 and 100970)
	252334	4	Socket Head Screw (10-24 UNC X 2-1/4" Lg., Torque 65/75 in. lbs.; For 100971)
6	58809	1	Valve Cover
7	*10930	1	O-ring (1-1/2" X 1-5/16" X 3/32)
8	12189	1	Thrust Washer
9	12188	1	Needle Bearing
10	250622	1	Spring Pin (Note: Orientate slot in roll pin towards outside diameter of rotor.)
11	24570	3	Shear Seal
12	*12184	3	Backup Washer (3/8 X 1/4 X .048)
13	10266	3	O-ring (3/8 X 1/4 X 1/16)
14	12187	3	Spring Washer
15	351274	1	Valve Stem
16	10716	1	Roll Pin (1/4 Dia. X 3/4 Lg.)
17	421306	1	Rotor
18	12223	1	Steel Ball (3/16 Dia.)
19	252353	1	Spring
20	*252211	1	Rod Wiper
21	421289	1	Valve Body (SAE Ports)
22	421288	1	Valve Body (NPT Ports)
23	*15279	4	O-ring (1/2 X 3/8 X 1/16)
24	421290	1	Valve Body (DO3 Mount)
25	252067	1	Spring Pin

Part numbers marked with an asterisk (*) are contained in Repair Kit No. 300941.

Refer to any operating instructions included with this product for detailed information about operation, testing, disassembly, reassembly, and preventive maintenance.

Items found in this parts list have been carefully tested and selected. **Therefore: Use only genuine Hytec replacement parts!**

Additional questions can be directed to our Technical Services Department.