



# POWER TEAM

HYDRAULIC TECHNOLOGIES

## 10 AND 25 TON START-UP KITS

*Conveniently packaged MRO  
Lifting and positioning kits*



# START-UP KITS

## 10 TON TURNKEY SETS



Order No.:  
**SK10T**

### Ordering Information

Order No		Kit Contents			
SK10T	SK10TE	Hand Pump	Usable Oil Cap. in <sup>3</sup> (cc)	Volume Per Stroke Low / High Press. in <sup>3</sup> (cc)	Weight lb (kg)
X	X	P19L	27 (443)	0.25 / 0.05 (4.1 / 0.9)	5.1 (2.3)
		Gauge	Type	Primary Units	Face Diameter in (mm)
X		9040	analog	psi	2.5 (63.5)
	X	9040E	analog	bar	2.5 (63.5)
		Hose	Length ft (m)	Burst Rating	I.D. in (mm)
X		9754	6 (1.8)	2:1	1/4 (6.5)
	X	9754E	6 (1.8)	4:1	1/4 (6.5)
		Cylinders	Capacity Short Tons	Stroke in (mm)	Collapsed Height in (mm)
X	X	C106C	10	6 (155.6)	9.75 (247.7)
X	X	RSS101	10	1 (38.1)	3.50 (88.9)
X	X	RH123	12	3 (76.2)	7.25 (184.2)
X	X	RLS100	10	0.44 (11.1)	1.75 (44.5)
		Spreader	Min. Clearance in (mm)	Max Spread in (mm)	Weight lb (kg)
X	X	HS2000	0.56 (14.2)	4 (101.6)	4.8 (2.2)
		Case	Material	L x H x W in (mm)	Weight w/o Product lb (kg)
X	X	2008632	Heavy Duty Plastic	31.5 x 20.5 x 11.5 (800 x 520 x 292)	12.7 (5.8)

Values shown in short tons (2,000 lb). To convert to long tons, multiply by 0.893. To convert to metric tons, multiply by 0.907.

### Features & Benefits

- 10 Ton Start-Up Kit covers a range of lifting, shifting, and positioning needs
- Broad range of cylinder types and strokes to fit many applications
- Neatly packaged in a durable, molded storage case to securely house your equipment and is ready to use upon opening
- All sets include a gauge tee (No. 9670), a complete coupler set (No. 9795), and a quart of oil (No. 9636)
- SK10TE kit is CE Compliant



Hand Pump is secured by an integrated strap in case.



Plastic Molded Case dimensions  
31.5"(L) x 20.5"(H) x 11.5"(W).

# START-UP KITS

## 25 TON TURNKEY SETS



*Note: Storage cases are **not** included with the 25 ton startup kits, they must be ordered separately.*


Order No.:  
**SK25T**

### Features & Benefits

- 25 Ton Start-Up Kit covers a range of lifting, shifting, and positioning needs
- Broad range of cylinder types and strokes to fit many applications
- All sets include a gauge tee (No. 9670), a complete coupler set (No. 9795), and a quart of oil (No. 9636)
- SK25TE kit is CE Compliant


### Optional 25 Ton Storage Cases

*Power Team offers two different storage boxes to house your SK25T.*

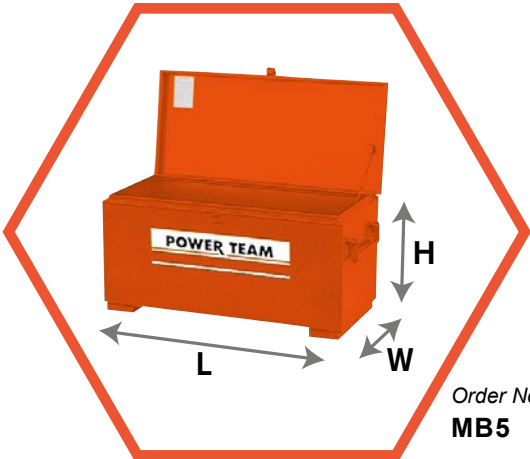

Order No.:  
**MB5**

Metal Box Dimensions  
32" (L) x 19" (W) x 14" (H)

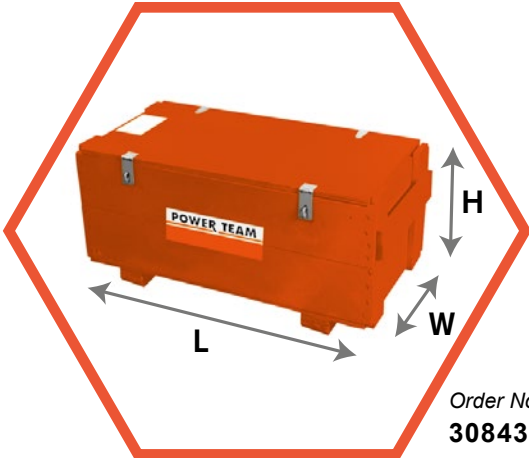

Order No.:  
**308435OR9**

### Ordering Information

Order No		Kit Contents			
SK25T	SK25TE	Hand Pump	Usable Oil Cap. in <sup>3</sup> (cc)	Volume Per Stroke Low / High Press. in <sup>3</sup> (cc)	Weight lb (kg)
X	X	P59L	66 (1082)	0.72 / 0.15 (12 / 2.6)	8.9 (4.1)
		Gauge	Type	Primary Units	Face Diameter in (mm)
X		9040	analog	psi	2.5 (63.5)
	X	9040E	analog	bar	2.5 (63.5)
		Hose	Length ft (m)	Burst Rating	I.D. in (mm)
X		9754	6 (1.8)	2:1	¼ (6.5)
	X	9754E	6 (1.8)	4:1	¼ (6.5)
		Cylinders	Capacity Short Tons	Stroke in (mm)	Collapsed Height in (mm)
X	X	C256C	25	6 (158.8)	10.75 (273)
X	X	RSS302	30	2 (61.9)	4.63 (117.5)
X	X	RH302	30	2 (63.5)	6.25 (158.8)
X	X	RLS300	30	0.5 (12.7)	2.31 (58.7)
		Spreader	Min. Clearance in (mm)	Max Spread in (mm)	Weight lb (kg)
X	X	HS2000	0.56 (14.2)	4 (101.6)	4.8 (2.2)

Values shown in short tons (2,000 lb). To convert to long tons, multiply by 0.893. To convert to metric tons, multiply by 0.907.

## RELATED PRODUCTS



**Gauges**



**Hydraulic Oil**



**Pullers**

## CUSTOMER SERVICE & SUPPORT

### **Americas**

Tel: +1 800 541 1418  
info.amer@hytec.com

### **Europe**

Tel: +31 45 567 8877  
info.emea@hytec.com

### **Asia Pacific**

Tel: +86 021 2208 5659 (China)  
Tel: +61 02 9763 4900 (Australia)  
Tel: +65 6265 4366 (Singapore)  
info.apac@hytec.com

### **Bolting Rental**

Tel: 1-713-472-2500 (Pasadena, TX)  
Tel: 1-361-445-3727 (Corpus Christi, TX)  
Tel: 1-225-774-0888 (Gonzales, LA)  
bolting.amer@hytec.com

### **Rail Systems**

Tel: +44 208 526 7100  
info.rail@hytec.com

### **Bolting Rental**

Tel: +65 6265 4366  
bolting.apac@hytec.com

Hydraulic Technologies reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information,

### **Distributed By:**

