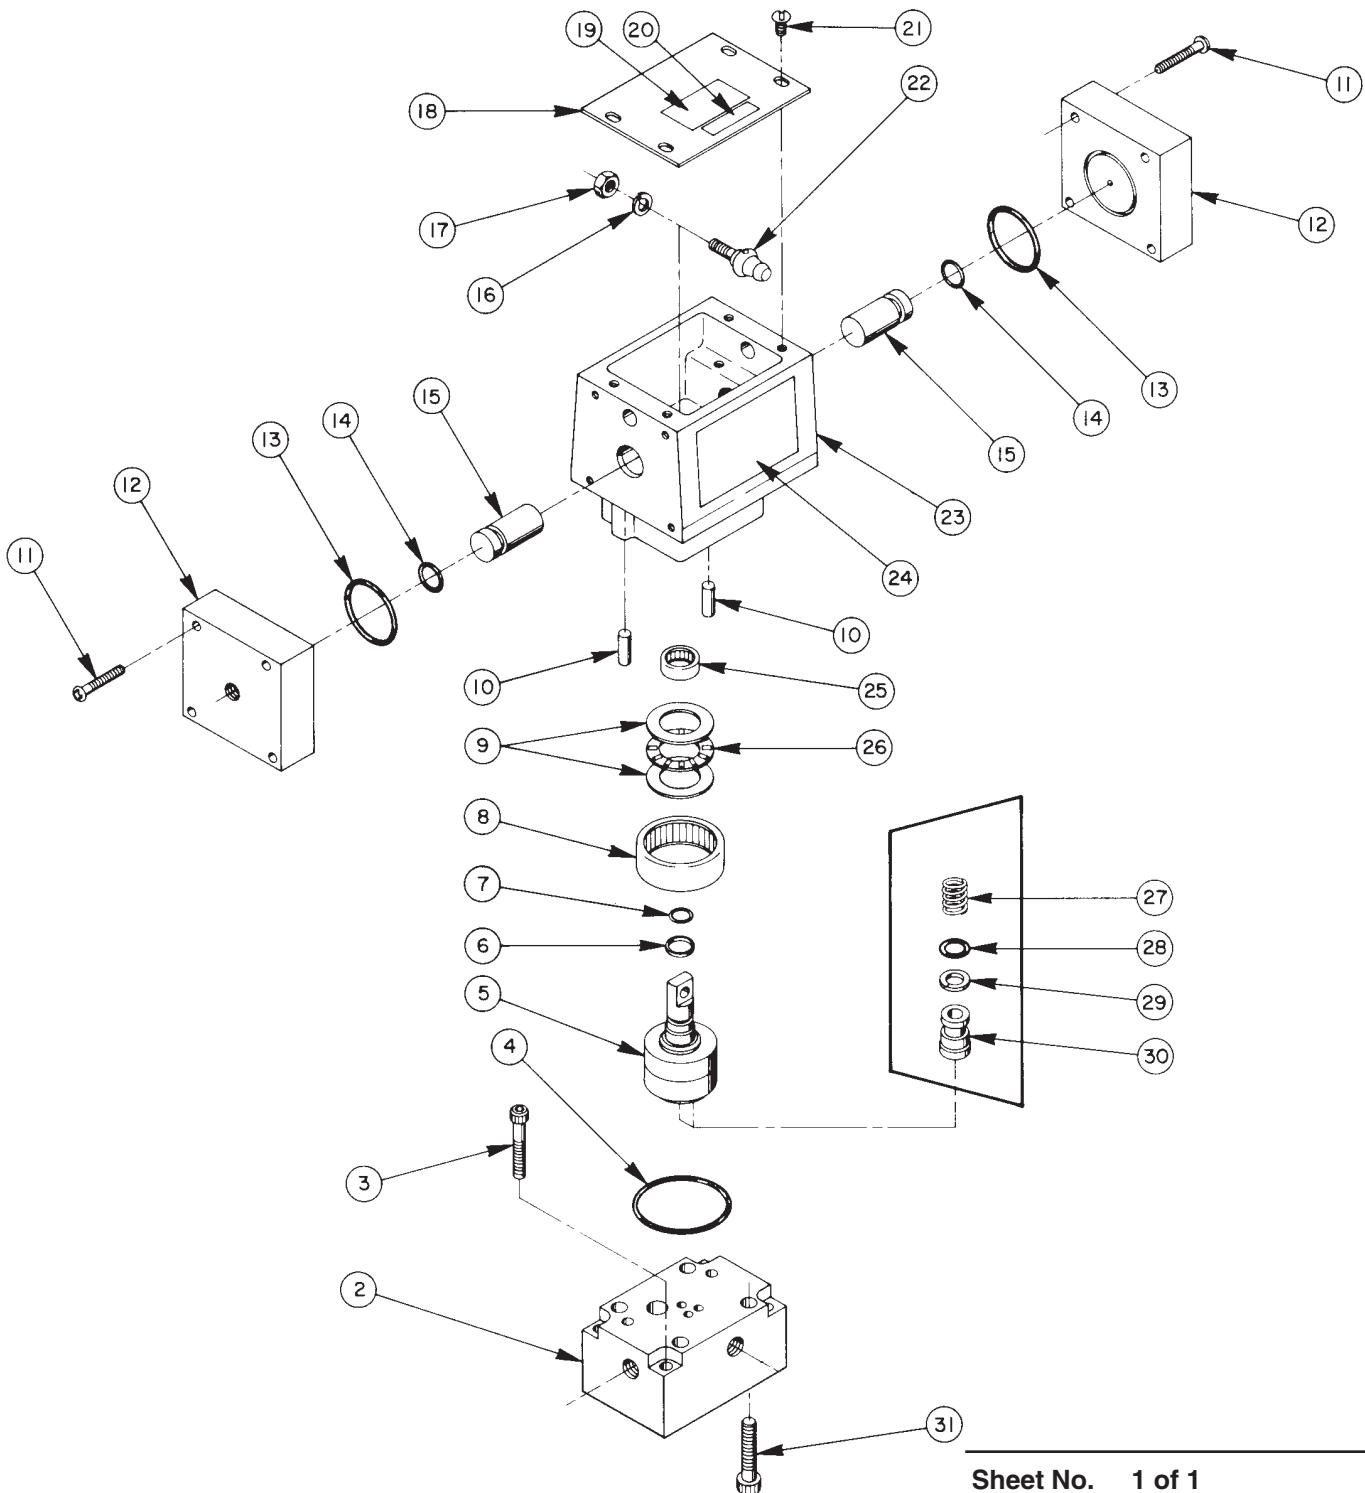


Hydraulic Technologies
5885 11th Street
Rockford, IL 61109-3699 USA

Tech. Services: (800) 477-8326
Fax: (800) 765-8326
Order Entry: (800) 541-1418
Fax: (800) 288-7031

Internet Address:
<http://www.powerteam.com>

Parts List for:

9595
**TWO POSITION, 4-WAY REMOTE MOUNTED, AIR OPERATED
VALVE ASSEMBLY**


Sheet No. 1 of 1

Rev. 3

Date: 27 Oct. 1998

Part List, Form No. 100543, Back sheet 1 of 1

Item No.	Part No.	No. Req'd	Description
2	61080	1	Subplate (Prior to 10-1-90)
	64092	1	Subplate (After 10-1-90)
3	10022	4	Soc. Hd. Mach. Screw (1/4-20 X 1-1/2 LG.)
4	*214699	1	O-ring (2-3/16 X 2 X 3/32)
5	52064	1	Rotor
6	*208672	1	Glyd Ring
7	*10268	1	O-ring (1/2 X 3/8 X 1/16)
8	17505	1	Needle Roller Bearing
9	15935	2	Thrust Washer
10	17567	2	Spring Pin
11	13025	8	Mach. Screw (#8-32 UNC X 1-1/4 Lg.; Torque to 30/60 in. lbs.)
12	45209	2	Air Cap
13	*14852	2	O-ring (1-9/16 X 1-3/8 X 3/32)
14	*210230	2	O-ring (11/16 X 1/2 X 3/32)
15	208673	2	Cam Plunger
16	10245	1	Lockwasher (1/4" bolt)
17	15504	1	Locknut (1/4-28 UNF)
18	303976	1	Cover
19	421846	1	Warning Decal
20	209383	1	Patent Decal
21	10164	4	Mach. Screw (#10-24 UNC X 3/8" Lg.)
22	304030	1	Lever
23	61077	1	Valve Body
24	208716	1	Part No. Decal
25	208671	1	Needle Roller Bearing
26	12188	1	Roller Bearing
27	15095	2	Compression Spring (1/4 O.D. X 15/32 Lg.)
28	*10265	2	O-ring (5/16 X 3/16 X 1/16)
29	*15174	2	Backup Washer (5/16 X 3/16 X 3/64)
30	303935	2	Shear Seal
31	10948	4	Soc. Hd. Cap Screw (Prior to 10-1-90) (5/16-18 X 1-1/2 Lg.; Torque to 300/400 in. lbs.)
	18328	4	Soc. Hd. Cap Screw (After 10-1-90) (5/16-18 X 2" Lg.; Torque to 150/200 in. lbs.)

PARTS INCLUDED BUT NOT SHOWN

9689	2	Straight Fitting
16797	2	90° Elbow Fitting

Part numbers marked with an (*) asterisk are contained in Repair Kit No. 300332.

Refer to any operating instructions included with this product for detailed information about operation, testing, disassembly, reassembly, and preventive maintenance.

Items found in this parts list have been carefully tested and selected. **Therefore: Use only genuine Power Team replacement parts!**

Additional questions can be directed to our Technical Services Department.

Note: Shaded areas reflect last revision(s) made to this form.