


HYDRAULIC WORK SUPPORT

Max. Capacity: 7,500 lbs. at 5,000 PSI

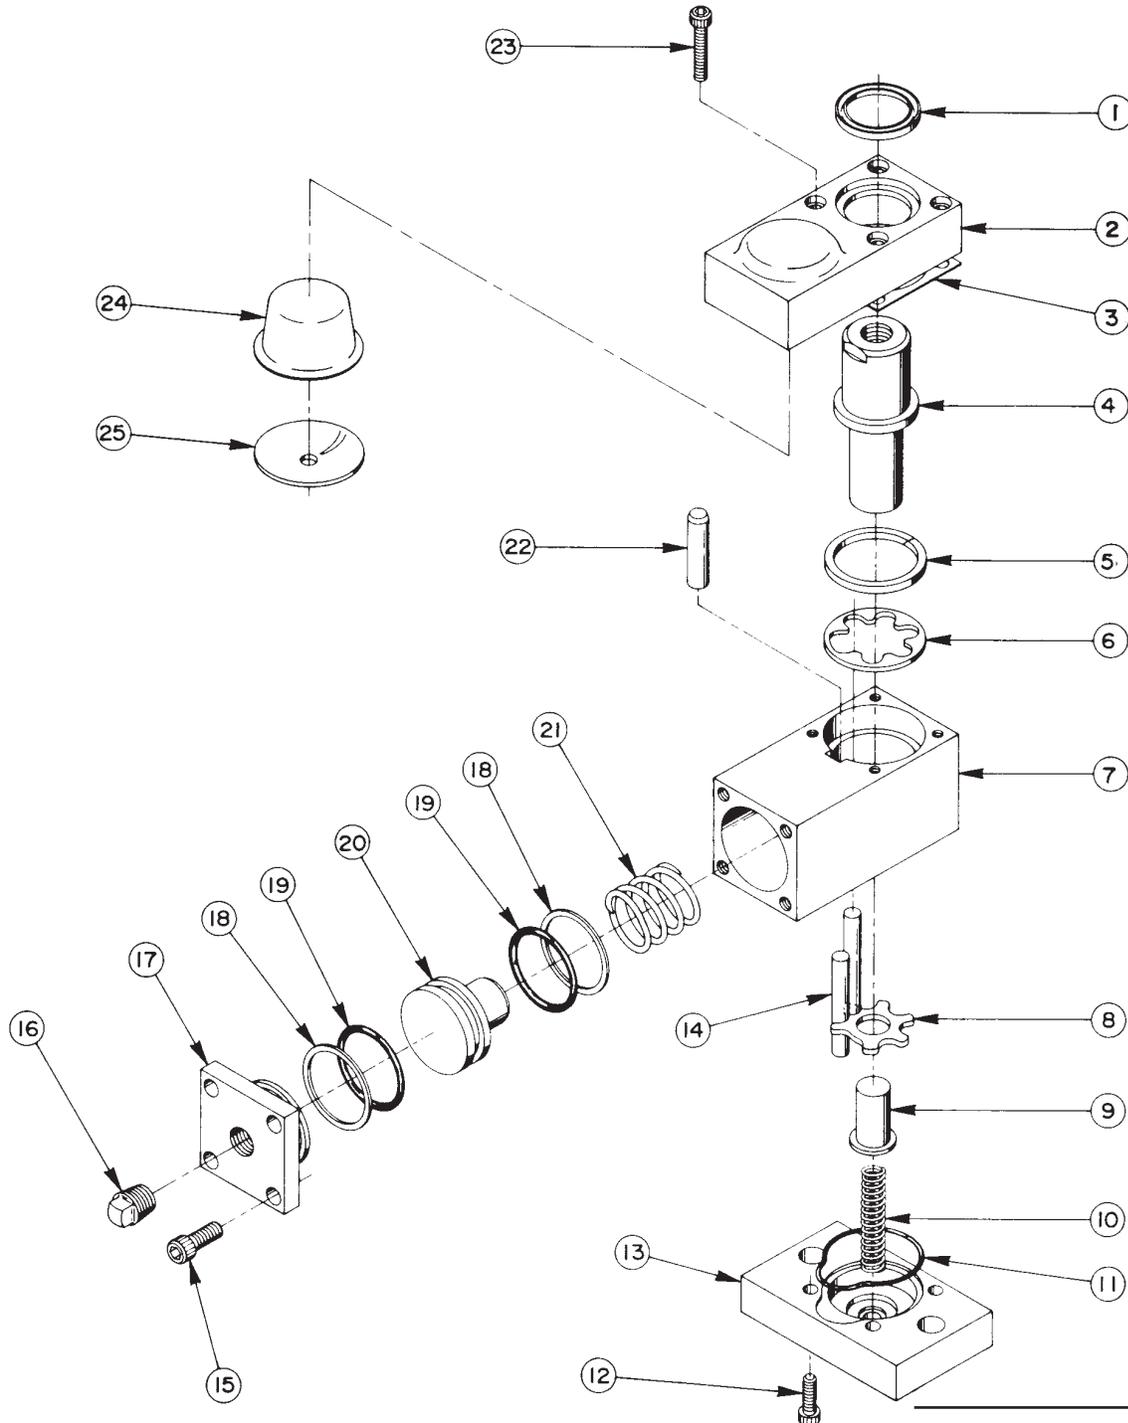

Parts List, Form No. 100665, Back sheet 1 of 1

| Item No. | Part No. | No. Req'd | Description |
|----------|----------|-----------|---|
| 1 | *15087 | 1 | Rod Wiper |
| 2 | 52864 | 1 | Cover Housing |
| 3 | *307061 | 1 | Gasket |
| 4 | 36437 | 1 | Center Shaft |
| 5 | *204379 | 1 | Tension Spacer (Oil and assemble ends opposite keyway) |
| 6 | 201882 | 1 | Upper Pin Retainer |
| 7 | 42334 | 1 | Body |
| 8 | 201883 | 1 | Lower Pin Retainer |
| 9 | 201877 | 1 | Plate Retainer |
| 10 | 17796 | 1 | Spring (3/8 O.D. x 3" Lg.; For 100226) |
| | 250273 | 1 | Spring (3/8 O.D. x 1-7/8 Lg.; For 100226-CM I) |
| 11 | *14875 | 1 | O-ring (1-5/8 x 1-1/2 x 1/16, -029) |
| 12 | 11152 | 4 | Soc. Hd. Cap Screw (#10-24 UNC x 5/8 Lg.; Torque to 40/50 in. lbs.) |
| 13 | 46654 | 1 | Bottom Plate (For 100226) |
| | 420082 | 1 | Bottom Plate (For 100226-CM I) |
| 14 | 201881 | 1 | Pin Set (NOTE: Must be replaced as a set of 12) |
| 15 | 10006 | 4 | Soc. Hd. Cap Screw (1/4-20 UNC x 5/8 Lg.; Torque to 140/160 in. lbs.) |
| 16 | 10970 | 1 | Pipe Plug (1/4 NPTF) |
| 17 | 201875 | 1 | End Cap |
| 18 | *19177 | 2 | Teflon Backup Washer (1-3/8 x 1-3/16 x 3/64 Thk.) |
| 19 | *10914 | 2 | O-ring (1-3/8 x 1-3/16 x 3/32, -123) |
| 20 | 201878 | 1 | Piston Plunger |
| 21 | 16346 | 1 | Compression Spring (1" O.D. x 7/8 Lg.) |
| 22 | 214463 | 1 | Dowel Pin (Special) |
| 23 | 14426 | 4 | Soc. Hd. Cap Screw (#10-24 UNC x 1" Lg.; Torque to 50/60 in. lbs.) |
| 24 | 307062 | 1 | Rubber Diaphragm |
| 25 | 205661 | 1 | Expansion Plug |

PARTS INCLUDED BUT NOT SHOWN

| | | |
|--------|---|--|
| 212988 | 2 | Trade Name & Capacity Decal (For 100226) |
| 215829 | 2 | Trade Name (For 100226-CM I) |

Part numbers marked with an asterisk (*) are contained in Repair Kit No. 300469.

Refer to any operating instructions included with this product for detailed information about operation, testing, disassembly, reassembly, and preventive maintenance.

Items found in this parts list have been carefully tested and selected. **Therefore: Use only genuine Hytec replacement parts!**

Additional questions can be directed to our Technical Services Department.

Note: Shaded areas reflect last revision(s) made to this form.