


MANIFOLD MOUNT HYDRAULIC WORK SUPPORT

Max. Capacity: 7,500 lbs. at 5,000 PSI

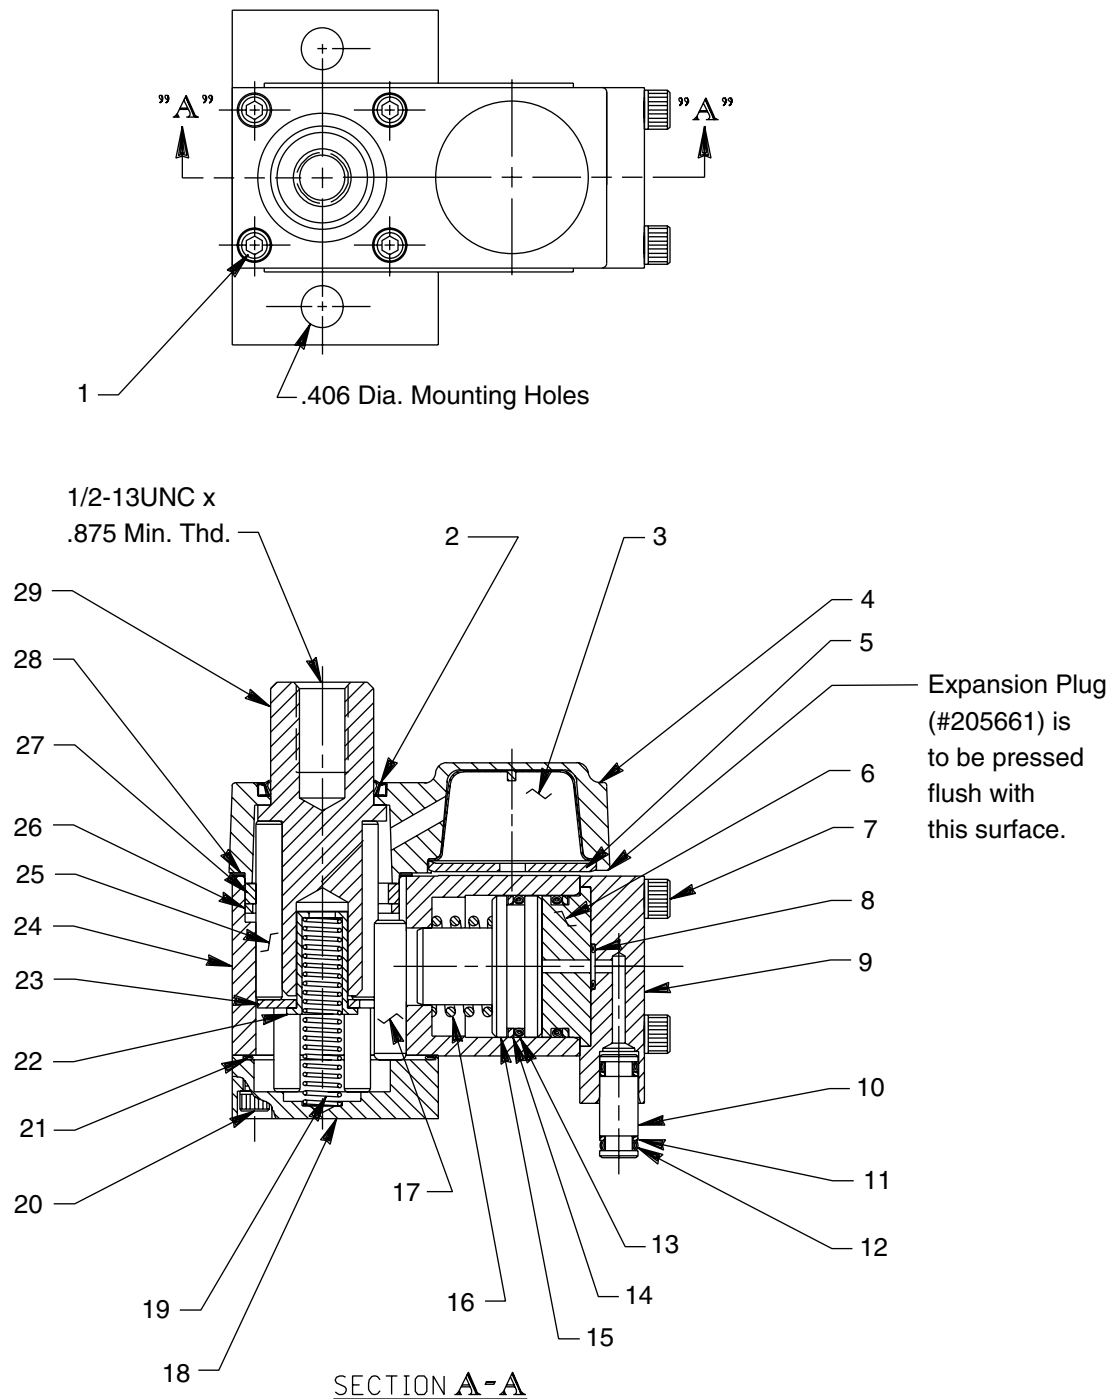

Item No.	Part No.	No. Req'd	Description
1	14426	4	Soc. Hd. Cap Screw (#10-24 x 1" Lg.; Torque to 50/60 in. lbs.)
2	*15087	1	Rod Wiper
3	307062	1	Rubber Diaphragm
4	52864	1	Cap
5	205661	1	Plug
6	215262	1	Lineup Bushing
7	10016	4	Soc. Hd. Cap Screw (1/4-20 x 1" Lg.; Torque to 140/160 in. lbs.)
8	*10267	1	O-ring (7/16 x 5/16 x 1/16)
9	308913	1	End Cap
10	215261	1	Spud Bushing
11	*12184	2	Backup Washer (3/8 x 1/4 x 1/16)
12	*10266	2	O-ring (3/4 x 1/4 x 1/16)
13	*10914	2	O-ring (1-3/8 x 1-3/16 x 3/32)
14	*19177	2	Teflon Backup Washer (1-3/8 x 1-3/16 x 3/32)
15	201878	1	Piston Plunger
16	16346	1	Compression Spring



Item No.	Part No.	No. Req'd	Description
17	214463	1	Special Dowel Pin
18	46654	1	Bottom Flange
19	17796	1	Compression Spring
20	11152	4	Soc. Hd. Cap Screw (#10-24 x 5/8 Lg.; Torque to 40/50 in. lbs.)
21	*14875	1	O-ring (1-5/8 x 1-1/2 x 1/16)
22	201877	1	Plate Retainer
23	201883	1	Lower Pin Retainer
24	42334	1	Body
25	201881	1	Pin Set (Must be replaced as a set of 12)
26	201882	1	Upper Pin Retainer
27	*204379	1	Tension Spacer
28	*307061	1	Gasket
29	36437	1	Center Shaft

PARTS INCLUDED BUT NOT SHOWN

216375 2 Trade Name Decal

Part numbers marked with an asterisk (*) are contained in Repair Kit No. 300518.

INSTALLATION INSTRUCTIONS

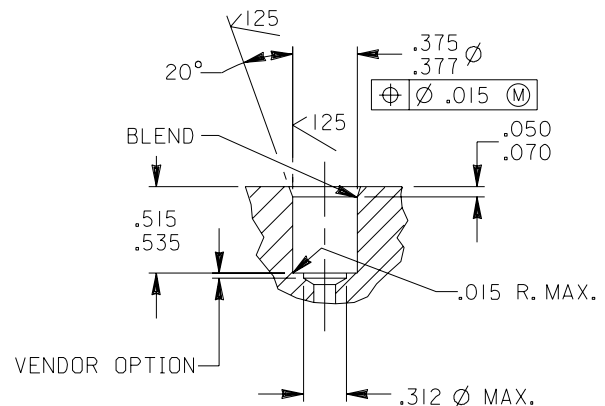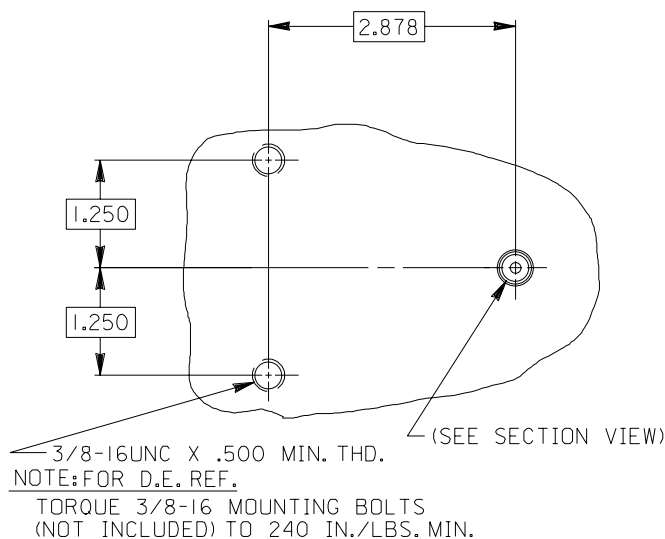

Note: Shaded areas reflect last revision(s) made to this form.